





Mismatch Termination

Features and Electrical specifications:

Model	MT-10WXX-R3540-NJ-XXG
Frequency Range	$F_0 \pm 5\%$ (F0 is the center frequency)
VSWR	1.5、2.0、2.5、3.0、3.5、4.0
VSWR Tolerance	$\pm 5\%$
Rated Power	10 W
Impedance	50 Ω
Connector Type	N-M (J)
Dimension	$\Phi 35.0 \times 40.0 \text{ mm}$
Operating Temperature	$-55 \sim +125^\circ\text{C}$ (See de Power De-rating)
Weight	Around 40 g
ROHS Compliant	Yes

Outline Drawing (Unit: mm/inch):

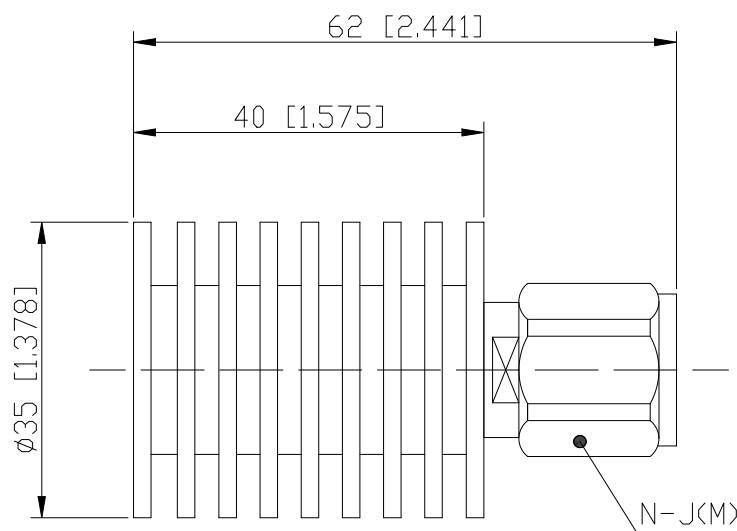




Use attention:

- 1、Dimensions Tolerance $\pm 3\%$;
- 2、If necessary, the product shall be air-cooled for auxiliary heat dissipation;
- 3、Custom designs available of other special Coaxial Terminations;
- 4、Pay attention to the direction of the product during use and strictly prohibit reverse connection.

Power De-rating:

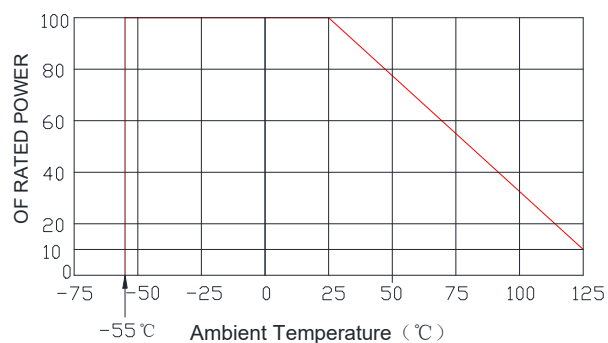

P/N Designation:

